

ShowSwitch™ Company Switch Assembly



200A 208Y/120VAC

Catalog No: CS22-200C-208Y/120-65-311-LS-CF3


Item No: 3322-61WG-3R

Features




- UL Listed company switch assembly with safety-interlocked integral 200A circuit breaker
- Type 3R flush mount 14ga powder coated wrinkle gray steel enclosure
- Safety-interlocked door for safe connection, operation, and maintenance
- Color-coded cam-style receptacles nested in interior chamber
- Indicator lights to confirm cam-style connectors are mated and circuit breaker is energized
- Recessed padlockable operator handle
- Padlockable door
- UL Listed molded case main circuit breaker protects operator & equipment


Drawing

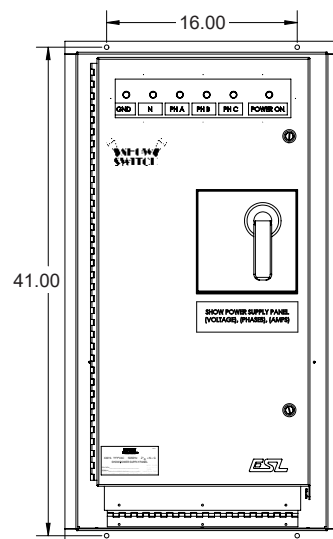

FRONT VIEW

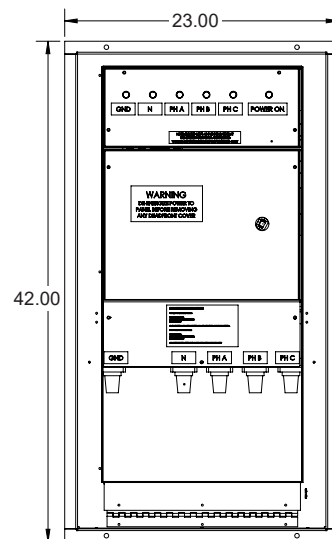

FRONT VIEW-DOOR REMOVED

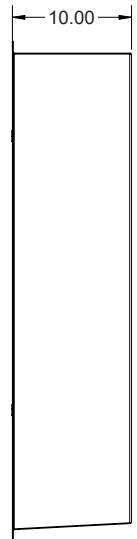

SIDE VIEW

Approvals

- UL/cUL 891 Listed assembly
- UL/cUL Listed cam-type receptacles
- UL 489 Listed / CSA certified molded case circuit breaker

Specifications

Catalog No: CS22-200C-208Y/120-65-311-LS-CF3

Item No: 3322-61WG-3R

Ratings

Receptacles	200A 208Y/120VAC rated single pole color-coded series 16 cam-style female black/red/blue phase receptacles, female white neutral receptacle and female green ground receptacle
Circuit breaker	200A Trip, 3P 65,000AIC @ 208Y/120VAC (100% rated circuit breaker optional)
Terminals	Breaker Line Terminals: 3/0 - 350 kcmil (other options available) Ground Lug - #6 - 250kcmil Neutral Lug - #6 - 250kcmil

Packaging

Approx. product weight	100 lbs.
Approx. shipping weight	135 lbs. (palletized)
Shipping dimensions	40 x 48 x 18

Options

- 480Y/277VAC
- Type 1
- Dual neutral
- Direct wire connection chamber
- 100% rated circuit breaker
- Stainless steel enclosure
- Wall mount, pad mount
- Isolated ground
- Choice of exterior color
- Ammeter
- Connection chamber light
- Reverse gender receptacle