

Y-Splitter Cord Assembly

32A 480VAC

(32A 380/440VAC per IEC 60309-1 & -2)

Catalog No: YA-32-480-36

Item No: 0904-02-36

Features




- 32A 480V “Y” cord assembly with 10/4 SOOW cable
- (2) E333FCA cord connectors
- (1) E333MP1A male plug
- Heavy duty watertight design for marine environment

Application and Usage

- Y-splitters are for temporary use when the installed reefer outlet capacity is not sufficient to meet short-term spike demands
- Do not connect or disconnect reefer plugs to a splitter while energized
- Reefer plugs must be connected to the splitters female cord connectors before connecting the male plug to an interlocked outlet
- Use of multiple Y-splitters on the same circuit is not recommended
- Do not exceed the Y-splitter rated current

Drawing

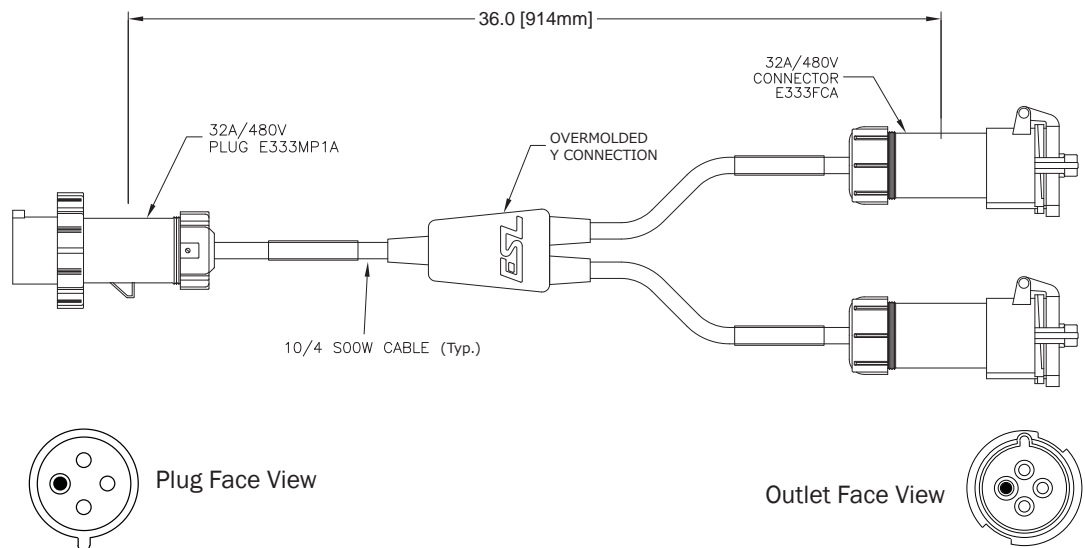

Approvals

- UL/cUL Listed plug
- UL/cUL Listed connectors

Specifications

Catalog No: YA-32-480-36

Item No: 0904-02-36

Ratings

Electrical

32A 480VAC pin & sleeve (380/440VAC 50/60 Hz) 3 phase 3 wire + ground, per IEC 60309-1 & -2

Environmental

Type 4X, IP67 per IEC 529/IEC 309-1 (with mated plugs and connectors)

Materials

Polyamide

Body, lock ring, gland ring, inner sleeve

Phenolic

Contact carrier

Brass

Contact pins

Polychloroprene

Gaskets

Buna-N (Nitrile/NBR)

O-rings

Polyamide base, silicon seal

Grommet

Rubber

Cable jacket, overmolded Y connection

Packaging

Product weight

4 lbs. ea

Shipping weight

4 lbs. ea

Shipping dimensions

13in x 13in x 13in (holds 5 pieces)