

INTERLOCKED POWER MODULE

400AMP 480VAC 3P 4W

Catalog No: R400-480-400-65NEY-SP

Item No: 1700-44AY




- Electrically Interlocked
- Heavy Duty Stainless Steel Construction Resists Corrosion & Abuse
- UL Listed Circuit Breaker Protects Operator & Equipment
- Mates with Appleton® AP40134F, AP40134G and Cooper Crouse-Hinds® AP404610 & AP404612 Male Plugs.

ESL Power Systems, Inc. • Tel: (951) 739-7020 • (800) 922-4188 • Fax: (951) 739-7048 • www.eslpwr.com • info@eslpwr.com

©2011 ESL Power Systems, Inc.
1700-44AY
111027

ESL
POWER SYSTEMS

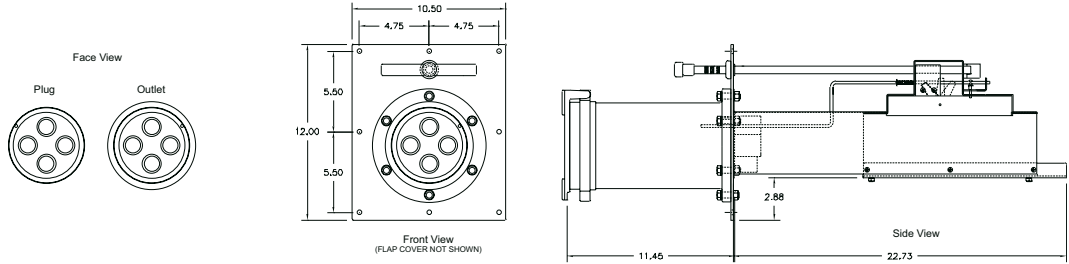

RATING:

- Receptacle - Cooper-Crouse Hinds® AR4042, 400A 600VAC 3P 4W
- Circuit Breaker - 400A Trip / 65,000AIC @ 480VAC with shunt trip
- Environmental - IP56 per IEC 529
(Screw Cover) Type 4X capable per NEMA 250, UL 50/508, CSA 22.2
- Terminals - (3) Phase & (1) Ground pressure type screw terminals

MATERIALS:

- Stainless Steel - Frame, On/Off Rod, Interlock Mechanism, and all Fasteners
- Polyester w/ Fiberglass - Contact Carrier
- Brass - Contact Sleeves
- Aluminum - Screw Cover / Snap Cover
- Aluminum - Receptacle Housing
- Neoprene (CR) - Gaskets, Cover Seals

APPROVALS:

- UL/cUL Listed Module • UL 489 Listed / CSA Certified Molded Case Circuit Breaker
- UL Listed Receptacle

ACCESSORIES / PARTS

Description	Item No.	Description	Item No.
• Circuit Breaker	4020-46	• Receptacle & Contact Sleeve Assy	4010-72

ESL Power Systems, Inc.

2800 Palisades Drive • Corona, CA 92880-9427
 Tel: (951) 739-7020 • (800) 922-4188 • Fax: (951) 739-7048

www.eslpwr.com • e-mail: info@eslpwr.com

