


INTERLOCKED POWER MODULE

30AMP 480VAC

Catalog No: R30-480-30-22SSND-SP

Item No:1700-80AN



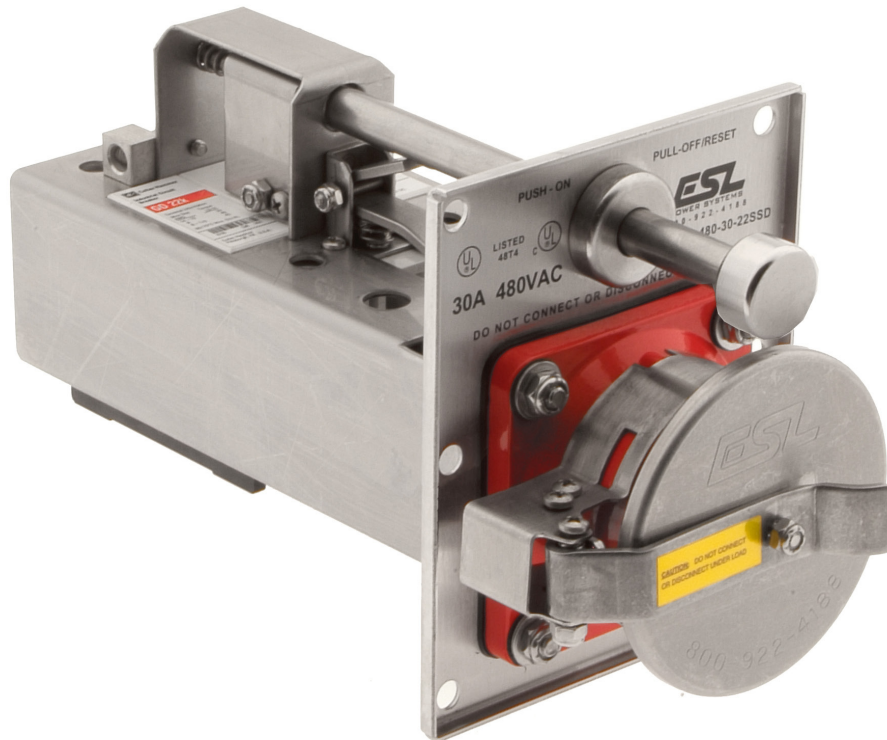


- Mates with IEC 430P7W Male Plug
- Heavy Duty Stainless Steel Construction Resists Corrosion & Abuse
- Stainless Steel Receptacle Housing with High-Temp Rynite® Insert
- UL Listed Circuit Breaker Protects Operator & Equipment
- Nickel Plated Brass Contacts & Unique Outlet Design Resists Corrosion & Arc Tracking

ESL Power Systems, Inc. • Tel: (951) 739-7020 • (800) 922-4188 • Fax: (951) 739-7048 • www.eslpwr.com • info@eslpwr.com

©2002 ESL Power Systems, Inc.
1700-80AN
080115

ESL
POWER SYSTEMS

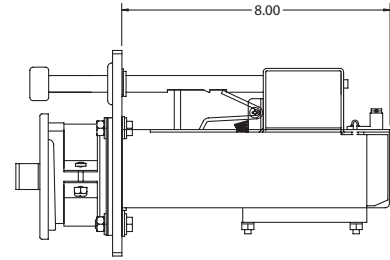

RATING:

- Receptacle - 30A 380/440V 50/60 Hz (480V 60Hz USA)
- Circuit Breaker - 30A Trip / 22,000AIC @ 480VAC
- Environmental - IP67 per IEC 529
(With Mated Plug or Screw Cover) Type 4X capable per NEMA 250, UL 50/508, CSA 22.2
- Terminals - (3) Phase & (1) Ground pressure type screw terminal
Phase: #10 - #2 AWG (2.5-10mm²) Wire Range
Ground: #10 - #2 AWG (2.5-10mm²) Wire Range

MATERIALS:

- Stainless Steel - Receptacle Housing, Frame, On/Off Rod, Interlock Mechanism, Contact Terminal Screws & Spring, Snap Cover, Screw Cover Tether, and all Fasteners
- Rynite[®] - Receptacle Insert
- Nickel Plated Brass - Contact Sleeves
- Polyamide (Nylon) - Screw Cover (optional)
- Neoprene (CR) - Gaskets, Cover Seals
- Buna-N (Nitrile/NBR) - O-Rings

APPROVALS:

UL/cUL Listed Module • UL 489 Listed / CSA Certified Molded Case Circuit Breaker

ACCESSORIES / PARTS

Description	Item No.	Description	Item No.
• Stainless Steel Snap Cover Assy	1500-01	• Circuit Breaker	4020-01
• Screw Cover (optional) & Tether Assy	1500-15	• Phase Sleeve Kit (set of 3)	4015-01
• Receptacle Insert Contact Sleeve Assy	4010-48N	• Ground Sleeve Kit	4016-03



ESL POWER SYSTEMS, INC.
 2800 Palisades Drive • Corona, CA 92880-9427
 Tel: (951) 739-7020 • (800) 922-4188 • Fax: (951) 739-7048

www.eslpwr.com • e-mail: info@eslpwr.com

©2002 ESL Power Systems, Inc.
1700-80AN