

Watertight Female Cord Connector



60A 480VAC
Catalog No: E634FC4
Item No: 1900-03P

Features



- UL Listed pin and sleeve female connector
- Heavy duty watertight design for marine environment
- One termination set screw per pole in backloaded contact carrier for easy assembly
- Snap cover also available

Drawing

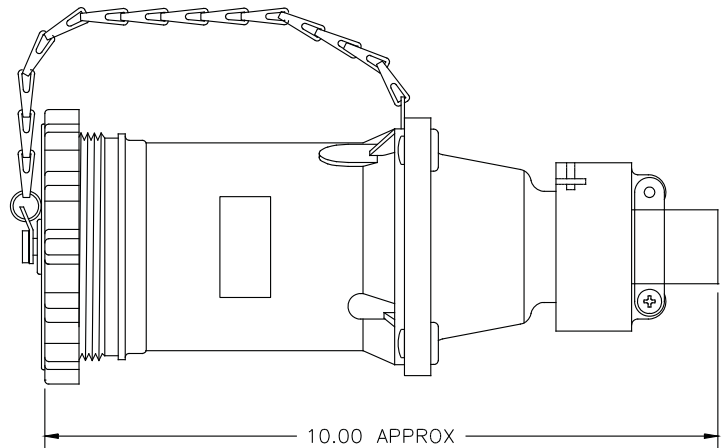

Approvals

- UL & cUL Listed

Specifications

Catalog No: E634FC4
Item No: 1900-03P

Ratings

Electrical	60A 480VAC pin & sleeve (380/440VAC 50/60 Hz) 3 phase 3 wire + ground
Cable	.748in (18.99mm) Max diameter
Environmental	Watertight
Terminals	(3) Phase & (1) ground pressure type M6 screw terminals (1 per pole) accept #8 AWG (10mm ²) conductors

Materials

Polyamide	Body, gland ring, screw cover
Phenolic	Insert
Brass	Sleeves
Polychloroprene	Gaskets, cable grommet
Buna-N (Nitrile/NBR)	O-rings
Stainless steel	Gland clamp

Packaging

Approx. product weight	2 lbs. (ea)
Approx. shipping weight	20 lbs. (carton of 10)
Approx. dimensions	12in x 5in x 5in (ea)