

Portable Transformer Unit


15KVA 240:480 Autotransformer
 Catalog No: XK50-240-32-480
 Item No: 2206-06E

Features



- 3-phase self contained, portable unit; safely connect 32A 480V reefers to 50A 240V power outlets
- Powder-coated steel enclosure resists corrosion & abuse, maintaining a clean, new look.
- Convenient carrying handle

Drawing

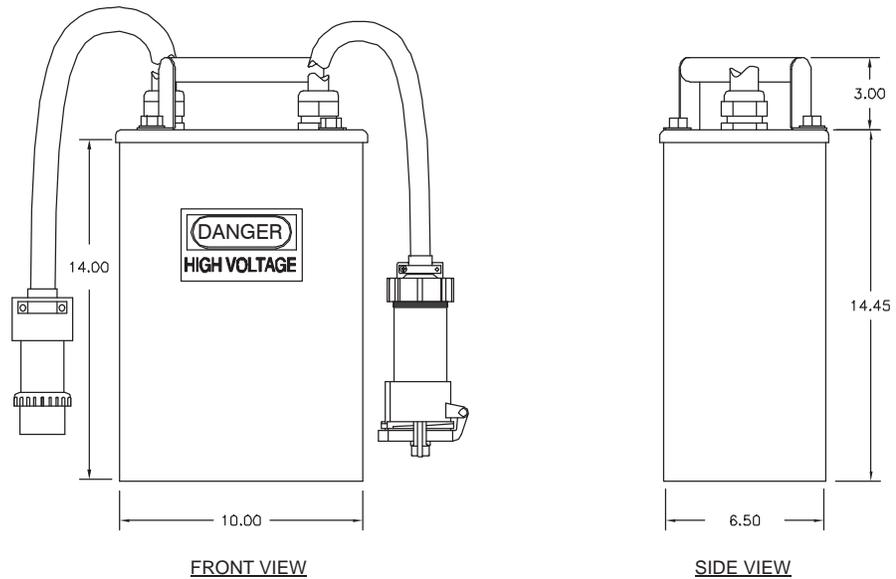

Specifications

Catalog No: XK50-240-32-480

Item No: 2206-06E

Ratings

| | |
|-------------|-------------------------------|
| Transformer | 15KVA 3Ø 60Hz (12.5 KVA 50Hz) |
|-------------|-------------------------------|

| | |
|-----------------|---------------------------|
| Nominal voltage | 1:2, 220-240: 440-480 VAC |
|-----------------|---------------------------|

Materials

| | |
|------------|---|
| Connectors | Watertight male plug E534MP, 50A 240VAC Female connector E333FCA, 32A 480VAC |
|------------|---|

Packaging

| | |
|--|-----------|
| Powder coated type 304 stainless steel | Enclosure |
|--|-----------|

| | |
|--------------------------|-------------|
| Varnish potting compound | Encapsulant |
|--------------------------|-------------|

| | |
|-----------------------------|-------------|
| Copper, Steel; Epoxy Sealed | Transformer |
|-----------------------------|-------------|

| | |
|------------------------|----------|
| Approx. product weight | 131 lbs. |
|------------------------|----------|

| | |
|-------------------------|----------|
| Approx. shipping weight | 136 lbs. |
|-------------------------|----------|