

# Portable Transformer Unit


15KVA 240:480 Autotransformer  
 Catalog No: XK30-240-32-480  
 Item No: 2206-06H

## Features



- Self contained, portable unit; safely connect 32A 480V reefers to 30A 240V power outlets
- Powder-coated stainless steel enclosure resists corrosion & abuse, maintaining a clean, new look
- Handles allow maximum flexibility for shipboard or landside use

## Drawing

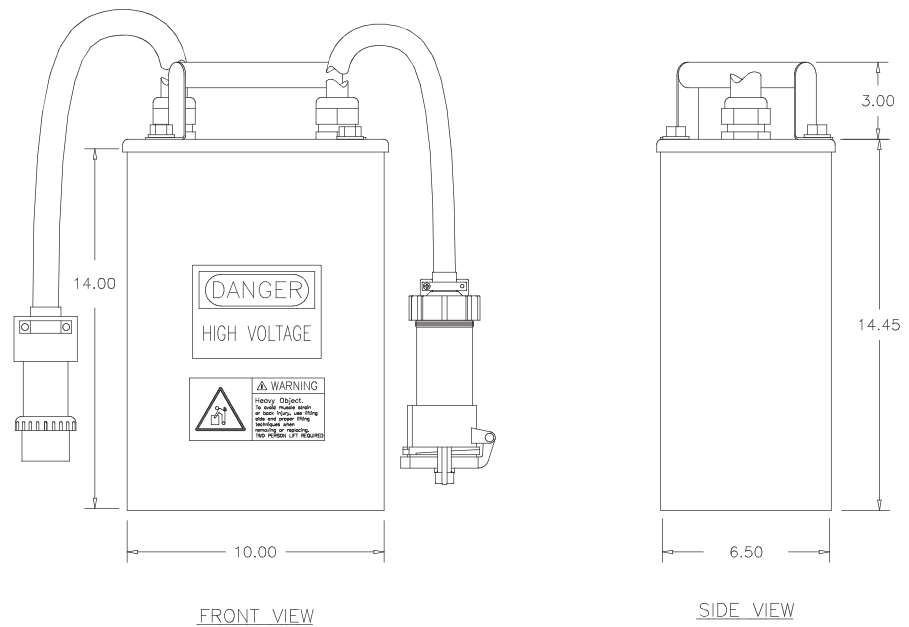

## Specifications

Catalog No: XK30-240-32-480

Item No: 2206-06H

### Ratings

|             |                               |
|-------------|-------------------------------|
| Transformer | 15KVA 3Ø 60Hz (12.5 KVA 50Hz) |
|-------------|-------------------------------|

|                 |                           |
|-----------------|---------------------------|
| Nominal voltage | 1:2, 220-240: 440-480 VAC |
|-----------------|---------------------------|

|            |   |
|------------|---|
| Connectors | Watertight male plug E334MP, 30A 250VAC<br>Female connector E333FCA, 32A 480VAC |
|------------|---|

### Materials

|  |           |
|--|-----------|
| Powder coated type 304 stainless steel | Enclosure |
|--|-----------|

|                          |             |
|--------------------------|-------------|
| Varnish potting compound | Encapsulant |
|--------------------------|-------------|

|                             |             |
|-----------------------------|-------------|
| Copper, Steel; Epoxy sealed | Transformer |
|-----------------------------|-------------|

### Packaging

|                        |          |
|------------------------|----------|
| Approx. product weight | 123 lbs. |
|------------------------|----------|

|                         |          |
|-------------------------|----------|
| Approx. shipping weight | 128 lbs. |
|-------------------------|----------|