

4-Gang Bunker Mount

32A 480VAC

(32A 380/440VAC per IEC 60309-1 & -2)

Catalog No: E4-R32-480-30-35SNQP-SP


Item No: 2283-74-1

Features




- UL Listed 4-gang assembly complete with UL Listed safety-interlocked outlets each containing an integral 30A circuit breaker
- Type 4x enclosure manufactured from 14GA seam-welded stainless steel powder-coated texture grey
- (4) safety-interlocked ESL outlets #1706-56ANP factory wired to power distribution block (PDB)
- UL Listed circuit breaker rated 35kAIC @ 480VAC provides short circuit & overcurrent protection at each outlet
- Each outlet's actuator rod allows user to turn on/off and reset tripped breaker
- PDB accepts incoming cable range of (2) #6AWG - 4/0 per phase line side
- Gasketed hinged door with clamps


Drawing




LEFT VIEW

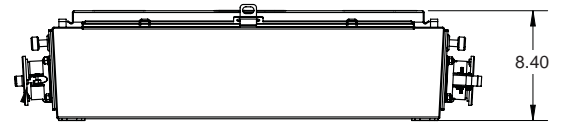

FRONT VIEW

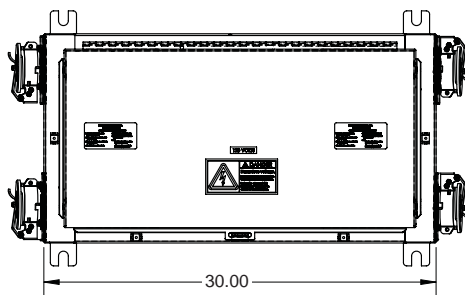

TOP VIEW

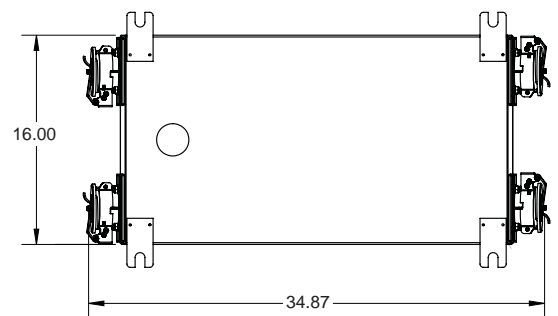

BOTTOM VIEW

Approvals

- UL/cUL Listed modules and assembly
- UL 489 Listed / CSA certified molded case circuit breakers

Specifications

Catalog No: E4-R32-480-30-35SNQP-SP
 Item No: 2283-74-1

Ratings

4-Gang assembly	120A 480VAC (380 - 480VAC 50/60hz) 3 phase 3 wire + ground, 35kAIC RMS symmetrical amps
Receptacles	32A 480VAC (380/440VAC 50/60 Hz) per IEC 60309-1 & -2
Circuit breakers	30A trip, 35,000AIC @ 480VAC, other trip and AIC ratings available - contact factory
Environmental	Type 4X/IP66
PDB terminals	Line side terminals accept (2) #6 - 4/0 per phase Ground terminal accepts #6 - #2/0

Materials

Stainless steel	Enclosure, access cover, outlet frames, on/off rods, interlock mechanisms, contact terminal screws & springs, snap covers and all fasteners
Aluminum	PDB Lugs
Nickel plated brass	Contact sleeves
Rynite®	Receptacle insert
Polyamide	Receptacle housing
Buna-N (Nitrile/NBR)	O-rings, gaskets, cover seals
GP Acetal	Knob, rod seal

Approximate Weight

Approx. weight	80 lbs.
Approx. shipping weight	85 lbs.

Replacement Parts

Description	Item No.	Description	Item No.
Safety-interlocked power outlet	1706-56ANP	Circuit breaker	4020-109
Stainless steel snap cover assembly	1500-01	Ground sleeve kit	4016-03
Receptacle insert contact sleeve assembly	4010-75	Phase sleeve kit	4015-01