

StormSwitch™ Manual Transfer Switch

UL 1008 Listed


425 - 600A, up to 600VAC
Series: 3060

Features




- Quick connect solution for a backup portable generator
- Mechanically interlocked mechanism prevents cross-connecting power sources
- Door & dead front panel for safe generator connection and operation
- Utility and generator disconnects are 3-pole circuit breakers as standard (optional 4-pole breakers or molded case switches available)
- Type 3R heavy gauge galv. steel enclosure with gray powdercoat RAL 7035 (stainless steel & additional colors optional)
- Suitable for Use as Service Equipment (SUSE)
- Color-coded cam style connectors for easy portable generator connection
- Direct wire connection available for indoor installations (TempTap Generator Docking Station Required)
- Handle cover provides security from unauthorized use
- Wall mountable; leg kits optional
- Operating instructions silkscreened on door
- U.S. Patent 7462792


Drawing

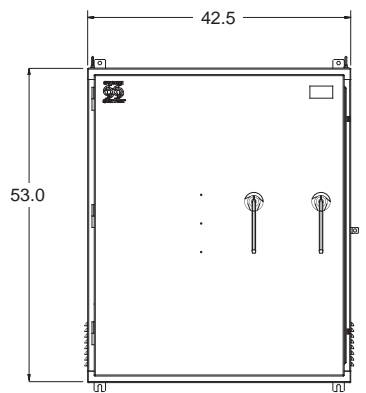


FRONT VIEW
(HANDLE COVER NOT SHOWN)



SIDE VIEW

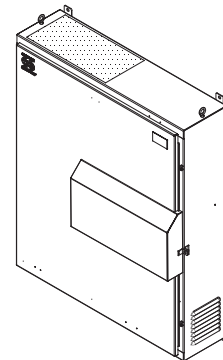

FRONT ANGLE VIEW



REAR ANGLE VIEW

Available incoming conduit entry locations shown shaded

Approvals

- UL/cUL 1008 Listed assembly
- UL 1691 Listed receptacles
- UL 489 Listed / CSA certified molded case circuit breaker
- UL 1087 Listed molded case switch
- OSHPD seismic certification (OSP)
- ICC-ES 156 shake-table tested/certified
- IBC 2015/ASCE 7-10 compliant


Specifications

UL 1008 Listed

StormSwitch™ Manual Transfer Switch
Series: 3060

Ordering Information

Example: SSD6 - 600C - 600C - 208 - 311 - S - C

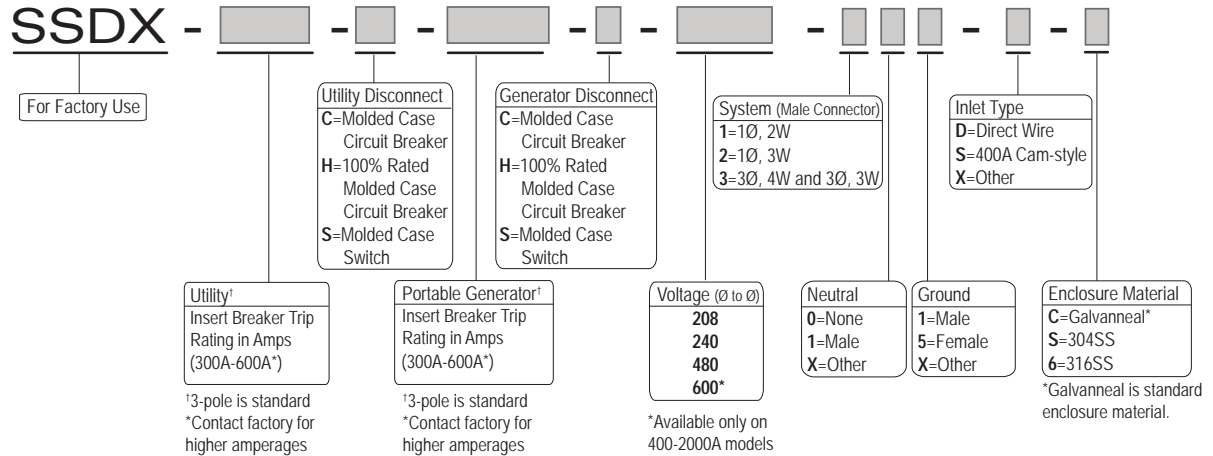

Contact factory for additional options

Ratings

Short circuit rating (breakers)	65kAIC @ 208VAC & 240VAC, 35kAIC @ 480VAC, 18kAIC @ 600VAC
Withstand rating (switches)	10kA @ 208VAC to 480VAC, 12kA @ 600VAC
Cam-style receptacles	(2) Sets of 400A, 600VAC for phase & neutral (1) 400A, 600VAC for ground
Terminals	Disconnect line terminals: (3) 3/0 - 500kcmil Load terminals: (4) #2 - 600kcmil Ground lug: #6 - 300kcmil Neutral: (4) #2 - 600kcmil Other options available
Environmental	Type 3R, gasketed (Type 3RX with 304SS or 316SS option)

Packaging

Approximate Product weight	450 lbs.
Approximate Shipping weight	490 lbs.