

OutTap™ Distribution Unit

UL 891 Listed


2000A, up to 600VAC
Series: 3822

Features




- Solution for temporary remote connection of generator to load bank
- Type 3R double coated, cold-rolled steel enclosure with gray powdercoat RAL 7035 (stainless steel & additional colors optional)
- Color-coded cam style female outlets
- Hinged, padlockable access door & dead front panel for safe cam connection and operation
- Hinged access plate secures cable entry compartment when not in use
- Optional dead switch on door for customer's use to activate up stream breaker
- Pad mount


Drawing

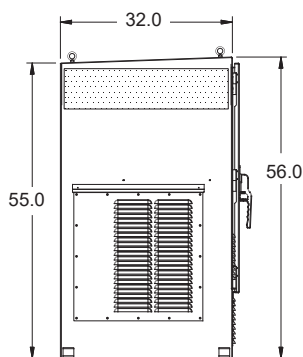


LEFT VIEW

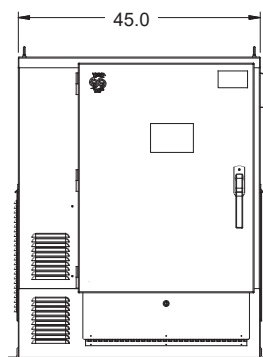

FRONT VIEW



TOP VIEW



BOTTOM VIEW

Available incoming conduit entry locations shown shaded.

Approvals

- UL/cUL 891 Listed assembly
- UL 1691 Listed receptacles

Specifications

UL 891 Listed

OutTap Distribution Unit Series: 3822

System Voltage	208Y/120 (3-Phases + Neutral + Ground) 208 (3-Phases + Ground) (no Neutral) 240 Delta (3-Phases + Ground) (no Neutral) 240/120 Delta (3-Phases + Neutral + Ground) (High Leg) 480 Delta (3-Phases + Ground) (no Neutral) 480Y/277 (3-Phases + Neutral + Ground) 600 Delta (3-Phases + Ground) (no Neutral) 600Y/347 (3-Phases + Neutral + Ground)	
Assembly Rating	42KA @ 240VAC, 42KA @ 480VAC, 42KA @ 600VAC	
Terminals	Line terminals: (8) 300 - 800kcmil per phase & neutral Ground lug: (6) #2 - 600kcmil Other options available	
Enclosure Material	Standard: Double coated, cold-rolled steel Optional: 304SS, 316SS	
Environmental Rating	Standard: 3R Optional: 3RX for stainless steel	
Enclosure Color Options (additional cost may be required)	Standard: RAL-7035 – Wrinkle Light Gray Optional: RAL-1015 – Wrinkle Light Ivory RAL-1023 – Wrinkle Traffic Yellow RAL-2004 – Wrinkle Pure Orange RAL-3020 – Wrinkle Traffic Red RAL-5002 – Wrinkle Ultramarine Blue	RAL-6024 – Wrinkle Traffic Green RAL-7004 – Wrinkle Signal Gray RAL-7038 – Wrinkle Agate Gray RAL-8017 – Wrinkle Chocolate Brown RAL-9003 – Wrinkle Signal White RAL-9005 – Wrinkle Jet Black
Optional Accessories	Pilot Light - Primary Source (Red) Pilot Light - Primary Source (Green) Pilot Light - Alternate Source (Red) Pilot Light - Alternate Source (Green) Infrared Window Phase Monitor Remote Start: 4 Point TB	Surge Protection Device (SPD) Heater/Thermostat/De-Humidistat Receptacle - 20A, 120V Duplex Receptacle - 20A, 120V GFCI Duplex Receptacle - 20A, 120V Twist Lock Receptacle - 30A, 120V Twist Lock Receptacle - 20A, 120V Straight Blade
Aproximate Product Weight:	600 lbs.	
Aproximate Shipping Weight:	680 lbs.	