

# OutTap™ Distribution Unit

**UL 891 Listed**


2800A, up to 480VAC  
Series: 3828

## Features




- Solution for temporary remote connection of generator to load bank
- Type 3R double coated, cold-rolled steel enclosure with gray powdercoat RAL 7035 (stainless steel & additional colors optional)
- Color-coded cam style female outlets
- Hinged, padlockable access door & dead front panel for safe cam connection and operation
- Hinged access plate secures cable entry compartment when not in use
- Optional dead switch on door for customer's use to activate up stream breaker
- Pad mount


## Drawing

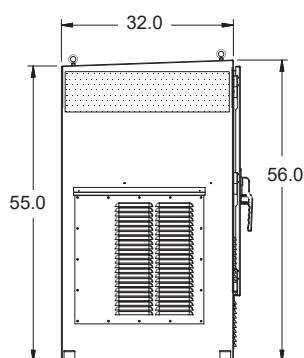


LEFT VIEW

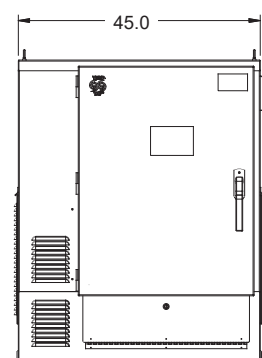

FRONT VIEW



TOP VIEW



BOTTOM VIEW

Available incoming conduit entry locations shown shaded.

## Approvals

- UL/cUL 891 Listed assembly
- UL 1691 Listed receptacles

## Specifications

**UL 891 Listed**

### OutTap Distribution Unit Series: 3828

|                                                              |                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Voltage                                               | 208Y/120 (3-Phases + Neutral + Ground)<br>208 (3-Phases + Ground) (no Neutral)<br>240 Delta (3-Phases + Ground) (no Neutral)<br>240/120 Delta (3-Phases + Neutral + Ground) (High Leg)<br>480 Delta (3-Phases + Ground) (no Neutral)<br>480Y/277 (3-Phases + Neutral + Ground)<br>600 Delta (3-Phases + Ground) (no Neutral)<br>600Y/347 (3-Phases + Neutral + Ground) |                                                                                                                                                                                                                                                            |
| Assembly Rating                                              | 42KA@240VAC, 42KA@480VAC, 42KA@600VAC                                                                                                                                                                                                                                                                                                                                  |                                                                                                                                                                                                                                                            |
| Terminals                                                    | Line terminals: (8) 300 - 800kcmil per phase & neutral<br>Ground lug: (6) #2 - 600kcmil<br>Other options available                                                                                                                                                                                                                                                     |                                                                                                                                                                                                                                                            |
| Enclosure Color Options<br>(additional cost may be required) | <b>Standard:</b> RAL-7035 - Wrinkle Light Gray<br>Optional: RAL-1015 - Wrinkle Light Ivory<br>RAL-1023 - Wrinkle Traffic Yellow<br>RAL-2004 - Wrinkle Pure Orange<br>RAL-3020 - Wrinkle Traffic Red<br>RAL-5002 - Wrinkle Ultramarine Blue                                                                                                                             | RAL-6024 - Wrinkle Traffic Green<br>RAL-7004 - Wrinkle Signal Gray<br>RAL-7038 - Wrinkle Agate Gray<br>RAL-8017 - Wrinkle Chocolate Brown<br>RAL-9003 - Wrinkle Signal White<br>RAL-9005 - Wrinkle Jet Black                                               |
| Optional Accessories                                         | Pilot Light - Primary Source (Red)<br>Pilot Light - Primary Source (Green)<br>Pilot Light - Alternate Source (Red)<br>Pilot Light - Alternate Source (Green)<br>Infrared Window<br>Phase Monitor<br>Remote Start: 4 Point TB                                                                                                                                           | Surge Protection Device (SPD)<br>Heater/Thermostat/De-Humidistat<br>Receptacle - 20A, 120V Duplex<br>Receptacle - 20A, 120V GFCI Duplex<br>Receptacle - 20A, 120V Twist Lock<br>Receptacle - 30A, 120V Twist Lock<br>Receptacle - 20A, 120V Straight Blade |
| Aproximate Product Weight:                                   | 600 lbs.                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                            |
| Aproximate Shipping Weight:                                  | 680 lbs.                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                                                                                            |