

TempTap™ Generator Docking Station with Breaker

UL 1008 Listed


1600A, up to 600VAC
Series: 4616

Features



- Solution for temporary remote connection of portable generator
- 3-Pole circuit breaker disconnect prevents making or breaking connections under load
- Type 3R, double coated, cold-rolled steel enclosure with wrinkle gray powdercoat RAL 7035 (stainless steel & additional colors optional)
- Color-coded cam style male inlets
- Door & deadfront panel for safe circuit breaker operation
- Safety-interlocked lower dead front for safe cable connection
- Hinged access plate secures cable entry compartment when not in use
- Standard side wireway extension for bottom conduit entry (can be omitted for other conduit entry/exit locations)

Drawing

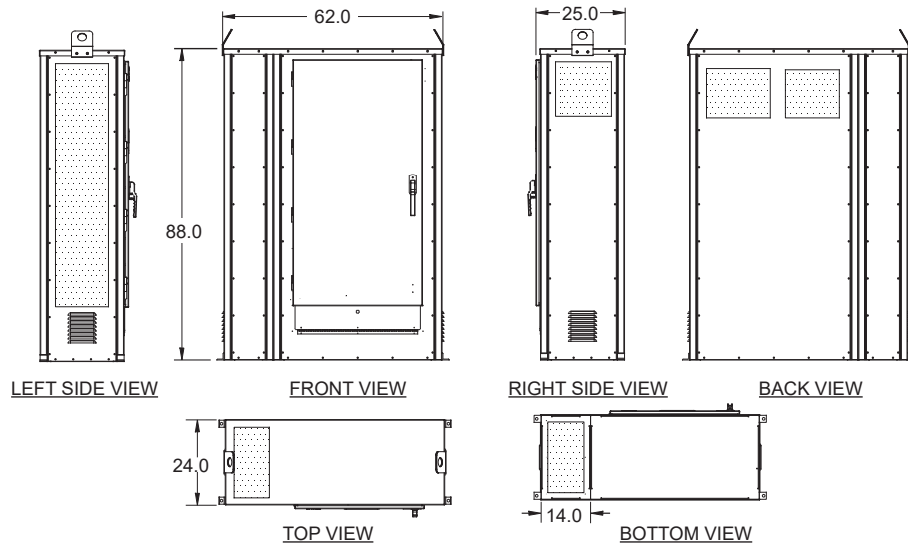

Available incoming conduit entry locations shown shaded

Approvals

- UL/cUL 1008 Listed assembly
- UL 1691 Listed receptacles
- UL 489 Listed / CSA certified molded case circuit breaker

