

# OutTap™ Distribution Unit with Breaker

**UL 891 Listed**


70 - 800A, up to 600VAC  
Series: 4800

## Features



- Solution for temporary remote connection of a facility's permanent generator to a load bank
- 3-pole Circuit breaker disconnect prevents energizing of cams unless door is closed
- Type 3R double coated, cold-rolled steel enclosure with gray powdercoat RAL 7035 (stainless steel & additional colors optional)
- Color-coded cam style female outlets
- Hinged, padlockable access door & dead front panel for safe cam connection and operation
- Hinged access plate secures cable entry compartment when not in use
- Handle cover provides security from unauthorized use
- Wall mountable; leg kits optional

## Drawing

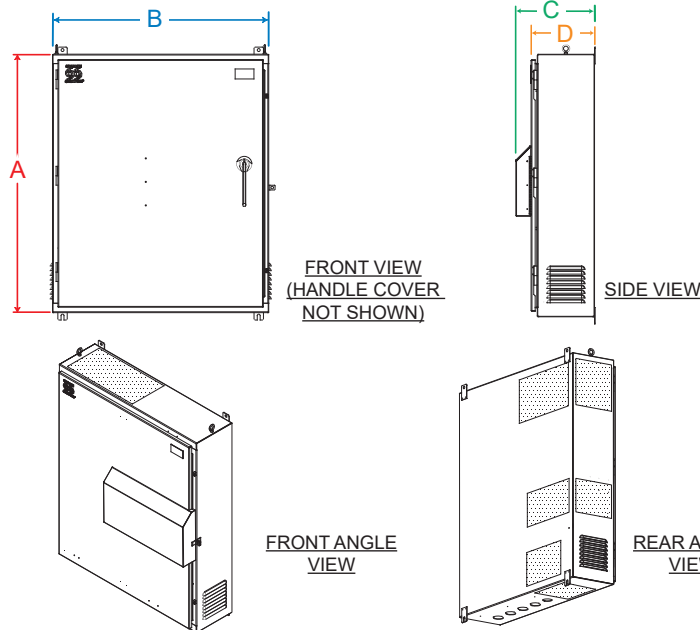

Dim	200A	400A	600A	800A
A	30"	45"	53"	55"
B	24"	34"	42.5"	46"
C	13.5"	14.6"	15.5"	16.6"
D	10.4"	11.4"	12.3"	13.4"
Approx Lbs.	138	310	450	680

*Note: Dimensions and weights are subject to change. Please verify with factory.*

Available incoming conduit entry locations shown shaded.

## Approvals

- UL/cUL 891 Listed assembly
- UL 1691 Listed receptacles
- UL 489 Listed / CSA certified molded case circuit breaker

# Specifications

**UL 891 Listed**

## OutTap Distribution Unit with Breaker Series: 4800

### Ordering Information & Options

System Voltage	120/240 (2-Phases + Neutral + Ground) 208Y/120 (3-Phases + Neutral + Ground) 208 (3-Phases + Ground) (no Neutral) 240 Delta (3-Phases + Ground) (no Neutral) 240/120 Delta (3-Phases + Neutral + Ground) (High Leg) 480 Delta (3-Phases + Ground) (no Neutral) 480Y/277 (3-Phases + Neutral + Ground)
Poles	3 (standard),
Assembly Rating	22kAic at 240VAC & 480VAC with Circuit Breakers (10kA with Switches)
Trip Type	LI (standard), Thermal Mag, LI Ammeter, LSI, LSI Ammeter, LSIG Ammeter, Automatic Switch
Circuit Breaker kAIC/ Switch kA	Standard: 65kA/240, 35kA/480, 18kA/600 Optional: 100kA/240, 65kA/480, 25kA/600 Optional: 125kA/240, 100kA/480, 50kA/600 Optional: 200kA/240, 200kA/480, 100kA/600
Disconnect Rating	80% Rated Disconnect (standard), 100% Rated Disconnect
Standard Shunt Trip Voltage	24 VDC Standard. Other Voltages Available
Terminals	Disconnect line terminals: 70 - 150A (1) #14AWG - 3/0 175A (1) #4AWG - 4/0 200A (1) 3/0 - 350kcmil 225-400A (2) 2/0 - 500kcmil 401-800A (3) 3/0 - 500kcmil  Ground lug: #6 - 300kcmil Neutral: 70-200A (2) #6AWG - 4/0 225-800A (4) #2 - 600kcmil  Other options available
Optional Disconnect Aux Contact	(1) N.O. / (1) N.C., (2) N.O. / (2) N.C.
Optional Disconnect Bell Alarm	(1) N.O. / (1) N.C.
Enclosure Material	Double coated, cold-rolled steel, 304SS, 316SS
Environmental Rating	3R (standard), 3RX
Enclosure Color	RAL-7035 - Wrinkle Light Gray (standard) RAL-1015 - Wrinkle Light Ivory RAL-1023 - Wrinkle Traffic Yellow RAL-2004 - Wrinkle Pure Orange RAL-3020 - Wrinkle Traffic Red RAL-5002 - Wrinkle Ultramarine Blue RAL-6024 - Wrinkle Traffic Green RAL-7004 - Wrinkle Signal Gray RAL-7038 - Wrinkle Agate Gray RAL-8017 - Wrinkle Chocolate Brown RAL-9003 - Wrinkle Signal White RAL-9005 - Wrinkle Jet Black
Optional Accessories	Pilot Light - Primary Source (Red) Pilot Light - Primary Source (Green) Pilot Light - Alternate Source (Red) Pilot Light - Alternate Source (Green) Phase Rotation Monitor Remote Start 4 Point TB Surge Protection Device (SPD) Heater/Thermostat/De-Humidistat Receptacle - 20A, 120V Duplex Receptacle - 20A, 120V GFCI Duplex Receptacle - 20A, 120V Twist Lock Receptacle - 30A, 120V Twist Lock Receptacle - 20A, 120V Straight Blade Other options available
Optional Extended Depth Enclosure	Extended Depth (8") for bottom conduit entry
Aproximate Product Weight:	Varies