

1-GANG WALL MOUNTED POWER OUTLET ASSEMBLY

200AMP 600VAC

Catalog No: E1-R200-600-200-25MEY-SP-220919AC
Item No: 2209-19AC




- Stainless Steel Receptacle Housing
- Heavy Duty Stainless Steel Construction Resists Corrosion & Abuse
- Electrically - Interlocked
- UL Listed Circuit Breaker Protects Operator & Equipment

SPECIFICATIONS

Catalog No: E1-R200-600-200-25MEY-SP-220919AC

Item No: 2209-19AC

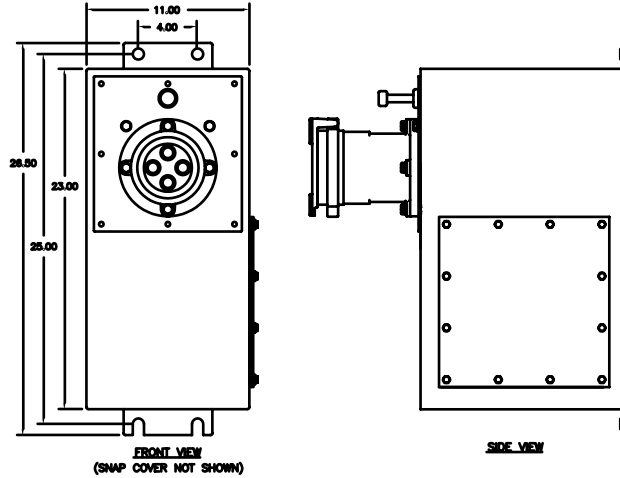

RATING:

- Receptacle - 200A 600V 50/60 Hz (600V 60Hz USA) per IEC 309-2 (CEE-17 3h)
- Circuit Breaker - 200A Trip / 25,000AIC @ 600VAC
other Trip and AIC ratings available - Contact Factory
- Environmental - IP67 per IEC 529 / IEC 309-1
(With mated plug or screw cover) Type 4X capable per NEMA 250, UL 50/508, CSA 22.2
- Terminals - (3) Phase & (1) Ground pressure type screw terminal
Phase: #10 - #2 AWG (2.5-10mm²) Wire Range
Ground: #10 - #2 AWG (2.5-10mm²) Wire Range
- Switch - BZ2RL711, 15A, 600VAC

MATERIALS:

- Stainless Steel - Enclosure, Receptacle Housing, Frame, On/Off Rod, Interlock Mechanism, Contact Terminal Screws & Spring, Snap Cover, Screw Cover Tether, and all Fasteners
- Nickel Plated Brass - Contact Sleeves
- Plaslok 5303 - Receptacle Insert
- Neoprene (CR) - Gaskets, Cover Seals

APPROVALS:

UL/cUL Listed Module • UL 489 Listed / CSA Certified Molded Case Circuit Breaker

ACCESSORIES / PARTS:

Description	Item No.	Description	Item No.
• Stainless Steel Snap Cover Assy	1500-XX	• Circuit Breaker	4020-XX
• Screw Cover (optional) & Tether Assy	1500-XX	• Phase Sleeve (set of 3)	4015-XX
• Receptacle Insert Contact Sleeve Assy	4010-XX	• Ground Sleeve Kit	4016-XX

ESL Power Systems, Inc.

2800 Palisades Drive • Corona, CA 92880-9427

Tel: (951) 739-7020 • (800) 922-4188 • Fax: (951) 739-7048

www.eslpwr.com • e-mail: info@eslpwr.com

©2007 ESL Power Systems
2209-19AC