

# 10-Gang Reefer Outlet Pedestal Mount Assembly

**32A 480VAC**

(32A 380/440VAC per IEC 60309-1 & -2)

Catalog No: E10-R32-480-30-22SND-SP


Item No: 2219-65B

## Features



- UL Listed 10-gang assembly complete with UL Listed safety-interlocked outlets each containing an integral 30A circuit breaker
- Type 4X enclosure manufactured from 14GA seam-welded stainless steel powder-coated texture gray (RAL7038)
- (10) safety-interlocked ESL 32A outlets #1700-56AN factory wired to power distribution block (PDB)
- UL Listed circuit breaker rated 22kAIC @ 480VAC provides short circuit & overcurrent protection at each outlet
- Each outlet's actuator rod allows user to turn on/off and reset tripped breaker
- PDB accepts incoming cable range of (2) #4 - 500kcmil per phase line side
- Gasketed bolt-on access cover with drip shield

## Drawing

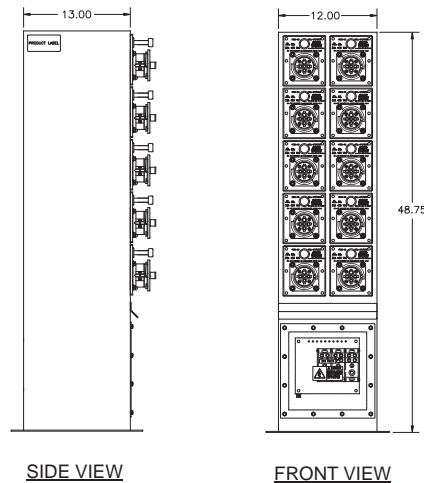

## Approvals

- UL Listed modules and assembly
- UL 489 Listed / CSA certified molded case circuit breakers

# Specifications

Catalog No: E10-R32-480-30-22SND-SP  
 Item No: 2219-65B

## Ratings

10-Gang assembly	300A 480VAC (440/480VAC 50/60hz) 3 phase 3 wire + ground, 22kAIC RMS symmetrical amps
Receptacles	32A 480VAC (380/440VAC 50/60 Hz) per IEC 60309-1 & -2
Circuit breakers	30A trip, 22,000AIC @ 480VAC, other trip and AIC ratings available - contact factory
Environmental	Type 4X/IP67
PDB terminals	Line side terminal accepts (2) #4 - 500kcmil per phase Ground terminal accepts (12) #14 - #4AWG

## Materials

Stainless steel	Enclosure, access cover, outlet frames, on/off rods, interlock mechanisms, contact terminal screws & springs, snap covers and all fasteners
Aluminum	PDB Lugs
Nickel plated brass	Contact sleeves
Rynite®	Receptacle insert
Polyamide	Receptacle housing
Buna-N (Nitrile/NBR)	O-rings, gaskets, cover seals

## Approximate Weight

Approx. weight	165 lbs.
Approx. shipping weight	175 lbs.

## Replacement Parts

Description	Item No.	Description	Item No.
Safety-interlocked power outlet	1700-56AN	Circuit breaker	4020-01
Stainless steel snap cover assembly	1500-01	Ground sleeve kit	4016-03
Receptacle insert contact sleeve assembly	4010-75	Phase sleeve Kit	4015-01