

## Stainless Steel Single Gang

### 32A 480VAC

(32A 380/440VAC per IEC 60309-1 & -2)

Catalog No: E1-R32-480-30-65SNQP-SP


Item No: 2263-22INW

#### **Features**



- UL Listed 1-gang assembly complete with UL Listed safety-interlocked outlet containing an integral 30A circuit breaker
- Type 4x enclosure manufactured from 14GA seam-welded stainless steel with texture gray powdercoat (RAL 7038)
- Factory installed safety-interlocked ESL outlet #1706-59ANP
- UL Listed circuit breaker rated 65kAIC @ 480VAC provides short circuit & overcurrent protection
- Actuator rod allows user to turn on/off and reset tripped breaker
- Universal mounting requires (4) fasteners
- Gasketed bolt-on access cover

#### Drawing

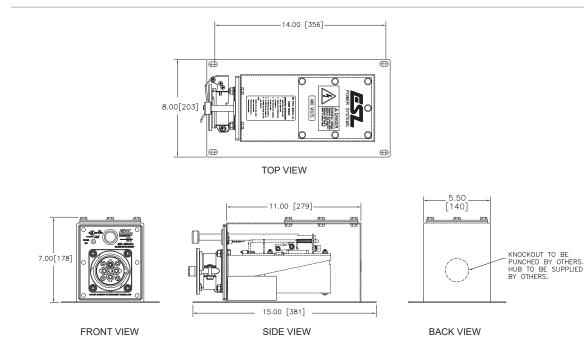

#### **Approvals**

- UL/cUL Listed modules and assembly
- UL/cUL 489 Listed / CSA certified molded case circuit breakers



# Specifications

Catalog No: E1-R32-480-30-65SNQP-SP

Item No: 2263-22INW

Ratings				
	Receptacle	32A 480VAC (380/440VAC 50/60 Hz) 3h 3 phase 3 wire + ground, per IEC 60309-1 & -2		
	Circuit breaker	30A trip, 65,000AIC @ 480VAC, other trip and AIC ratings available - contact factory		
	Environmental	Type 4X/IP66		
	Terminal	Installer wires direct to circuit breaker: (3) phase & (1) ground pressure type screw terminals, Phases: #14 - $1/0$ AWG (2.1 - $53$ mm²) wire range, Ground: #14 - #2 AWG (2.1 - $35$ mm²) wire range		
Materials				
	Stainless steel	Enclosure, access cover, outlet frame, on/off rod, interlock mechanism, contact terminal screws & spring, snap cover and all fasteners		
	Nickel plated brass	Contact sleeves		
	Rynite®	Receptacle insert		
	Polyamide	Receptacle housing		
	Buna-N (Nitrile/NBR)	O-rings, gaskets, cover seals		
Packaging				
	Product weight	16 lbs.		
	Shipping weight	17 lbs.		
	Shipping dimensions	16in x 8in x 8in		
Replacement Parts	Description	Item No.	Description	Item No.
	Safety-interlocked power outlet	1706-59ANP	Circuit breaker kit	4020-110
	Stainless steel snap cover assembly	1500-01	Ground sleeve kit	4016-03
	Replacement receptacle kit	4010-75	Phase sleeve kit	4015-01
	Receptacle insert kit	4010-76		